


O DELTA
IN2ITION®

- 2-In-1 shower
- Touch-Clean[®] nozzles

Submitted Model No.: _ Specific Features:

6"

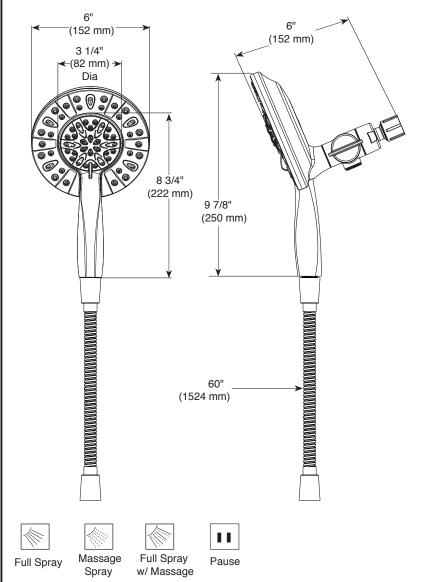

STANDARD SPECIFICATIONS:

- Integrated handshower docks securely into showerhead when not in use.
- 2.5 gpm @ 80 psi, 9.5 L/min @ 550kPa. (75490▲)
- 1.75 gpm @ 80 psi, 6.6 L/min @ 550kPa. (75491▲)
- Diverter allows for single or shared operation of showerhead and handshower.
- Fixed showerhead and handshower all in one.
- 60"(1524 mm) Stainless steel hose.
- Multiple handshower spray settings and pause feature - not a positive shut-off.
- Ball connector swivel angle is 35°. (17.5° per side)

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® (75491 ▲ only)

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafauet.com for finish options and product availability.

